


Rec'd PCT/PTO 24 JAN 2005

PCT/EP 03/08151



INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Signed 

Dated 11 July 2003

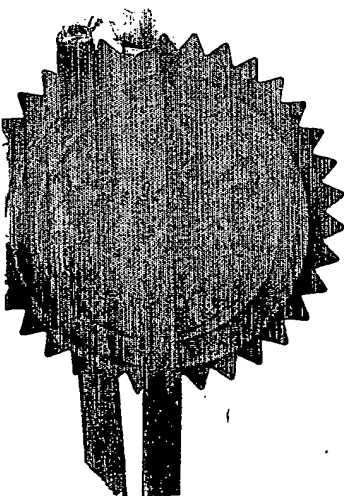

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

Patents Act 1977
(Rule)

The
Patent
Office

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
K

25 JUL 2002

NEWPORT

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your Reference

CGP/PG4885

2. Patent application number

(The Patent office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

GLAXO GROUP LIMITED
GLAXO WELLCOME HOUSE
BERKELEY AVENUE
GREENFORD
MIDDLESEX
UB6 0NN
UNITED KINGDOM

00473587003

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its corporation

4. Title of the invention

MEDICAMENT DISPENSER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

DR CHRISTOPHER GERARD PIKE
PIKE & CO.
HAYES LOFT
68A HAYES PLACE
MARLOW
BUCKS
SL7 2BT

JASON NEALE RICE
GLAXOSMITHKLINE
CORPORATE INTELLECTUAL PROPERTY
980 GREAT WEST ROAD
BRENTFORD
MIDDLESEX
UB6 0NN

Patents ADP number (if you know it)

06552335002

151-10710

6. If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of Filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant a patent required in support of this request? (Answer yes if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheet of this form 0

Description 35

Claim(s) 1 *PN*

Abstract 0

Drawing(s) 0

10. If you are also filing any of the following,
state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination
and search (*Patent Form 9/77*)

Request for substantive examination
(*Patent Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application



Signature Christopher Gerard Pike
AGENT FOR THE APPLICANTS

24 July 2002

12. Name and daytime telephone number of
person to contact in the United Kingdom

Dr. Christopher G. Pike
01628 471869

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patent Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

Additional Agents

BLAKEY, Alison Jane
CRAWLEY, Karen
CONNELL, Anthony Christopher
DALTON, Marcus Jonathan William
DAWSON, Hugh B
DOLTON, Peter I
EASEMAN, Richard Lewis
FILLER, Wendy Anne
GIDDINGS, Peter John
HACKETT, Ruth Elizabeth
HOCKLEY, Sin Catherine
LAWTON, Peter Philip
LEAROYD, Stephanie Anne
LUBIENSKI, Michael John
PRIVETT, Kathryn Louise
QUILLIN, Helen Kaye

REED, Michael A
REES, Marion L
REEVES, Julie Frances
ROBERTS, David
RUSSELL, Brian John
RUTTER, Keith
STEPHEN, Robert
STOTT, Michael John
TEUTEN, Andrew J
THOMPSON, Clive Beresford
THORNLEY, Rachel M
TYRRELL, Arthur William Russell
VALENTINE, Jill Barbara
WALKER, Ralph Francis
WATERS, David Martin
WEST, Vivien
WHITE, Susan Mary

ADDRESS

Glaxo Wellcome plc
Glaxo Wellcome House
Berkeley Avenue
Greenford
Middlesex
UB6 0NN
Great Britain

Medicament dispenser

Technical field

5

The present invention relates to a medicament dispenser for dispensing 'multi-active' medicament combination products. The invention particularly relates to an inhaler device for use in dispensing medicament in combination product form.

10

Background to the invention

The use of inhalation devices in the administration of medicaments, for example in bronchodilation therapy is well known. Such devices generally comprise a body or housing within which a medicament carrier is located. Known inhalation devices
15 include those in which the medicament carrier is a blister strip containing a number of discrete doses of powdered medicament. Such devices usually contain a mechanism of accessing these doses, usually comprising either piercing means or means to peel a lid sheet away from a base sheet. The powdered medicament can then be accessed and inhaled. Other known devices include those in which the
20 medicament is delivered in aerosol form, including the well-known metered dose inhaler (MDI) delivery devices. Liquid-based inhaler devices are also known.

Therapies involving combinations of different and complementary active medicaments are known. These can be administered either as distinct combination
25 (i.e. plural-active) medicament products, which comprise a defined mixture of each component medicament, or as groups of single active medicament products, which are designed to be taken in combination or sequentially. Whilst combination products offer added convenience for the patient, certain medicament actives are difficult to formulate as distinct combination products. For example, the co-actives may interact
30 chemically with each other in an undesirable way when formulated together.

The problem of undesirable physical or chemical interaction between different medicament constituents can be especially complex and difficult to address for combination products combining three or more different medicaments in a single-formulated product (a 'multi-active combination product'). In particular, one or more
5 of the medicament components may be non-complementary with one or more of the other medicament components. This complexity can potentially either restrict development choice, or lead to compromise in pharmaceutical performance, when developing any particular multi-active combination product.

- 10 Whilst the above problem may be addressed by separate formulation of the various components and sequential delivery thereof by separate and different types of inhaler, this is inconvenient for the patient and can lead to confusion in situations where for example, the different inhalers are of different types or contain different numbers of doses of medicament.

15

The Applicants therefore now provide, in solution to the above problem, a medicament dispenser device (and packs suitable for use therewith) that enables the separate (i.e. in isolated fashion) containment of a first product comprising plural compatible medicament components, and of one or more incompatible medicament
20 components. Here the term 'compatible' is used to mean compatible in the sense of being amenable to co-formulation with each other.

The device enables the delivery of all of the medicament components together as a combined product for administration to the patient. Suitably, the combined dose is
25 deliverable in response to a minimum number of patient actions. In particular, it is desirable that each active component of the combined dose is delivered to the patient in a single, combined dose in response to a single patient dosing action. For example, it is desirable that a combined product for inhalation be delivered in response to a single patient actuation of an inhaler, even where the incompatible
30 active components of that combined product are separately stored within the inhaler device.

The Applicants have also observed that particular medicaments and combinations thereof can be more suited for formulation and delivery by particular types of inhaler device. For example, one particular medicament (or combination) may be more
5 suitable for delivery by an MDI device, whereas another may be more suitable for delivery by a DPI device. That suitability may for example, be driven by ease of formulation of the medicament for that particular inhaler device or by the delivery and pharmaceutical performance characteristics obtainable when the particular inhaler device is employed.

10

The Applicants have also now realised that this preferential suitability can potentially either restrict development choice, or lead to compromise in pharmaceutical performance, when developing an inhaler device for any particular multi-active combination product. The problem is encountered where one or more component
15 medicaments of the combination product is suited to delivery by one particular type of inhaler device, whereas one or more of the other component medicaments of that combination product is suited to delivery by a different type of inhaler device.

The Applicants therefore now provide, in solution to the above problem, a single
20 inhaler device, which comprises in combination different inhaler types (e.g. combined DPI and MDI; MDI and LSI; or DPI and LSI). The device enables convenient, combined delivery of the components of a combination medicament product to a patient. Suitably, the delivery of the medicament combination occurs on a simultaneous basis and is responsive to a minimum number of patient actions (e.g.
25 single patient actuation or inhalation step).

The Applicants have also realised that using a dispenser device of the type described above can potentially reduce the complexity, timescale and cost of the development process for a particular 'multi-active' combination product because it
30 enables the optimum (e.g. from a development simplicity) delivery vehicle to be selected for each particular medicament component of the combination. The

additional development complexity, which is often associated with formulating combination products is thereby effectively avoided.

5

Summary of the invention

According to one aspect of the invention there is provided a medicament dispenser device for use in the delivery of a multi-component combination medicament product, the device comprising

10

a first medicament container containing plural co-formulation compatible medicament components;

first release means for releasing the contents of the first medicament container for
15 delivery thereof;

at least one further medicament container, each containing at least one co-formulation incompatible medicament component; and

20 at least one further release means for releasing the contents of each at least one further medicament container for delivery thereof;

wherein the at least one co-formulation incompatible medicament component is kept separate from the plural co-formulation compatible components until the point of
25 release thereof for delivery in combination.

The term 'co-formulation compatible' is used to mean compatible in the sense of being amenable to co-formulation, perhaps even displaying synergetic co-formulation characteristics. The term 'co-formulation incompatible' is used to mean
30 the reverse, that is to say for whatever reason including chemical or physical incompatibility or simply lack of synergetic characteristics or benefits, the

medicament components are either non-amenable to co-formulation or for whatever reason, including for development simplicity, preferably not co-formulated.

In combination, the co-formulation compatible medicament components and at least
5 co-formulation incompatible medicament component comprise a defined combination product. That is to say, that when combined together the distinct active medicament doses released by actuation of the device form a dose of a 'multi-active' medicament treatment.

10 On actuation, the dispenser device is designed to deliver a dose portion of the plural co-formulation compatible medicament components and a dose portion of each at least one co-formulation incompatible medicament. The term 'dose portion' is employed because in the context of the invention the distinct 'portions' are brought together on delivery to form a combination (i.e. multi-active) product dose.

15 The first and at least one further medicament containers may be of a similar-type or in aspects, be of a different type. This enables additional flexibility in that one container may for example, accommodate a product in dry powder form whereas the other container accommodates product in liquid, solution or aerosol form.

20 In one aspect, the first medicament container and the at least one further medicament container are of a type adapted to be used with a medicament dispenser selected from the group consisting of a reservoir dry powder inhaler (RDPI), a multi-dose dry powder inhaler (MDPI), a metered dose inhaler (MDI) and a
25 liquid spray inhaler (LSI). The first medicament dispenser and at least one further remain different in type.

In one aspect, the first medicament dispenser is a reservoir dry powder inhaler (RDPI), and the at least one further medicament dispenser is of a type selected from
30 the group consisting of a multi-dose dry powder inhaler (MDPI), a metered dose inhaler (MDI) and a liquid spray inhaler (LSI).

In another aspect, the first medicament dispenser is a multi-dose dry powder inhaler (MDPI), and the at least one further medicament dispenser is of a type selected from the group consisting of a reservoir dry powder inhaler (RDPI), a metered dose
5 inhaler (MDI) and a liquid spray inhaler (LSI).

In a further aspect, the first medicament dispenser is a metered dose inhaler (MDI), and the at least one further medicament dispenser is of a type selected from the group consisting of a reservoir dry powder inhaler (RDPI), a multi-dose dry powder
10 inhaler (MDPI) and a liquid spray inhaler (LSI).

In a further aspect, the first medicament dispenser is a liquid spray inhaler (LSI), and the at least one further medicament dispenser is of a type selected from the group consisting of a reservoir dry powder inhaler (RDPI), a multi-dose dry powder inhaler
15 (MDPI) and a metered dose inhaler (MDI).

By reservoir dry powder inhaler (RDPI) it is meant an inhaler having a reservoir form container pack suitable for containing multiple (un-metered doses) of medicament product in dry powder form and including means for metering medicament dose from
20 the reservoir to a delivery position. The metering means may for example comprise a metering cup, which is movable from a first position where the cup may be filled with medicament from the reservoir to a second position where the metered medicament dose is made available to the patient for inhalation.

25 By multi-dose dry powder inhaler (MDPI) is meant an inhaler suitable for dispensing medicament in dry powder form, wherein the medicament is comprised within a multi-dose container pack containing (or otherwise carrying) multiple, define doses (or parts thereof) of medicament product. In a preferred aspect, the carrier has a blister pack form, but it could also, for example, comprise a capsule-based pack form
30 or a carrier onto which medicament has been applied by any suitable process including printing, painting and vacuum occlusion.

In one aspect, the multi-dose pack is a blister pack comprising multiple blisters for containment of medicament product in dry powder form. The blisters are typically arranged in regular fashion for ease of release of medicament therefrom.

5

In one aspect, the multi-dose blister pack comprises plural blisters arranged in generally circular fashion on a disc-form blister pack. In another aspect, the multi-dose blister pack is elongate in form, for example comprising a strip or a tape.

- 10 Preferably, the multi-dose blister pack is defined between two members peelably secured to one another. US Patents Nos. 5,860,419, 5,873,360 and 5,590,645 in the name of Glaxo Group Ltd describe medicament packs of this general type. In this aspect, the device is usually provided with an opening station comprising peeling means for peeling the members apart to access each medicament dose. Suitably,
- 15 the device is adapted for use where the peelable members are elongate sheets which define a plurality of medicament containers spaced along the length thereof, the device being provided with indexing means for indexing each container in turn. More preferably, the device is adapted for use where one of the sheets is a base sheet having a plurality of pockets therein, and the other of the sheets is a lid sheet,
- 20 each pocket and the adjacent part of the lid sheet defining a respective one of the containers, the device comprising driving means for pulling the lid sheet and base sheet apart at the opening station.

- By metered dose inhaler (MDI) it is meant a medicament dispenser suitable for
- 25 dispensing medicament in aerosol form, wherein the medicament is comprised in an aerosol container suitable for containing a propellant-based aerosol medicament formulation. The aerosol container is typically provided with a metering valve, for example a slide valve, for release of the aerosol form medicament formulation to the patient. The aerosol container is generally designed to deliver a predetermined dose
- 30 of medicament upon each actuation by means of the valve, which can be opened

either by depressing the valve while the container is held stationary or by depressing the container while the valve is held stationary.

Where the medicament container is an aerosol container, the valve typically
5 comprises a valve body having an inlet port through which a medicament aerosol formulation may enter said valve body, an outlet port through which the aerosol may exit the valve body and an open/close mechanism by means of which flow through said outlet port is controllable.

10 The valve may be a slide valve wherein the open/close mechanism comprises a sealing ring and receivable by the sealing ring a valve stem having a dispensing passage, the valve stem being slidably movable within the ring from a valve-closed to a valve-open position in which the interior of the valve body is in communication with the exterior of the valve body via the dispensing passage.

15 Typically, the valve is a metering valve. The metering volumes are typically from 10 to 100 μl , such as 25 μl , 50 μl or 63 μl . Suitably, the valve body defines a metering chamber for metering an amount of medicament formulation and an open/close mechanism by means of which the flow through the inlet port to the metering
20 chamber is controllable. Preferably, the valve body has a sampling chamber in communication with the metering chamber via a second inlet port, said inlet port being controllable by means of an open/close mechanism thereby regulating the flow of medicament formulation into the metering chamber.

25 The valve may also comprise a 'free flow aerosol valve' having a chamber and a valve stem extending into the chamber and movable relative to the chamber between dispensing and non-dispensing positions. The valve stem has a configuration and the chamber has an internal configuration such that a metered volume is defined therebetween and such that during movement between is non-
30 dispensing and dispensing positions the valve stem sequentially: (i) allows free flow of aerosol formulation into the chamber, (ii) defines a closed metered volume for

pressurized aerosol formulation between the external surface of the valve stem and internal surface of the chamber, and (iii) moves with the closed metered volume within the chamber without decreasing the volume of the closed metered volume until the metered volume communicates with an outlet passage thereby allowing
5 dispensing of the metered volume of pressurized aerosol formulation. A valve of this type is described in U.S. Patent No. 5,772,085.

By liquid spray inhaler (LSI) it is meant a medicament dispenser suitable for dispensing medicament in spray form, wherein the medicament is typically
10 formulated in liquid or solution form and comprised in a liquid container. The container is typically provided with a means of metering to a spray generator, which imparts energy to the liquid or solution, thereby generating a spray for inhalation by the patient. The spray generator, in aspects, comprises a vibrating element (e.g. a mesh) that provides vibrational energy to the formulation, thereby resulting in its
15 aerosolisation. In other aspects, the spray generator comprises a pump mechanism, which either delivers the medicament directly to the patient (as a liquid spray) or which delivers the medicament to an intermediate position at which further energy is supplied thereto to further propel, aerosolise or otherwise direct the medicament dose to the patient.

20

The medicament dispenser device herein has unitary form, and typically has a housing shaped to receive, and enable the release of medicament product from the first and at least one further medicament containers.

25 In one aspect, the housing integrally comprises a release means for releasing medicament from at least one, preferably all of the medicament dispensers. Suitably, the release means for each medicament container is coupled, thereby enabling simultaneous delivery of medicament from each dispenser in response to a single patient actuation step.

30

In another aspect, the housing is shaped to receive the medicament containers, each of which is provided with respective release means. In this case, the release means have typically been adapted for receipt by the housing. The medicament dispenser and release means therefor are in one aspect, supplied as independently
5 operable 'cassette refills' for the unitary device.

In one aspect, the device is provided with mixing means for ensuring mixing of the delivered medicaments prior to their inhalation by the patient as a 'mixed' multi-active combination product.

10

Suitably, the mixing means comprises a mixing chamber including inlets for receiving medicament from each medicament container and an outlet for delivery of 'mixed' medicament product to the patient for inhalation (e.g. through a mouthpiece which communicates with the mixing chamber). The ergonomics of the mixing chamber will
15 be arranged to ensure effective mixing of the separate medicament feeds. In aspects, baffles, propellers, venturi and other features for controlling mixing dynamics are provided. The mixing chamber may also be provided with energisation means for energising the mixing process, or alternatively features may be provided to harness the energy provided by a patient's inward breath to enhance the mixing
20 process.

The dispenser device may be provided with means for varying the amount of medicament product released from each medicament container. Customized delivery of combination medicament product may therefore be achieved through varying the
25 relative ratios of each individual medicament product delivered as well as by varying the absolute amount of medicament product delivered. Variable timing mechanisms are envisaged for achieving such customisation.

Delivery of the combination product (e.g. after mixing) to the patient is preferably
30 through a single outlet. The outlet is typically positioned to be in communication with the distinct medicament dose portions delivered. The outlet may have any suitable

form. In one aspect, it has the form of a mouthpiece and in another, it has the form of a nozzle for insertion into the nasal cavity of a patient.

The outlet is preferably a single outlet, which communicates with the distinct
5 medicament dose portions delivered via a common air channelling means (e.g. formed as an air-pipe or common manifold). The patient may therefore breathe in through a single outlet, and that breath be transferred through the common channelling means to (all of) the released medicament dose portions, thereby enabling their inhalation as a multi-active combined product.

10

In addition to, or as an alternative to, any separate mixing chamber, the outlet and/or channelling means may be shaped to encourage mixing of medicament as a result of the air flow created by inhalation by the patient. For example, baffles or other mechanical aids to mixing may be incorporated. Venturi channelling of the air flow is
15 also envisaged in embodiments. Helical form channels are envisaged.

Any or all mechanical components of the device may be driven by either an electronic or mechanical drive system or combination thereof.

20 Suitably electronic drive means typically comprise a motor, preferably an electrically-powered motor. The motor may provide linear or rotary drive, but in general, rotary motors are most suitable. The motor may for example, comprise a DC electric motor, a piezoelectric (PZ) motor, an ultrasonic motor, a solenoid motor or a linear motor. Preferably, the electronic drive system comprises a DC motor, a PZ motor or an
25 ultrasonic motor.

The use of ultrasonic motors is particularly preferred since they offer advantages over conventional motors in terms of weight, size, noise, cost and torque generated.

Ultrasonic motors are well known in the art and are commercially available (e.g.
30 BMSTU Technological Cooperation Centre Ltd, Moscow, Russia; Shinsei Corporation, Tokyo, Japan).

Ultrasonic motors do not use coils or magnets but comprise a piezo-electric ceramic stator which drives a coupled rotor. The stator generates ultrasonic vibrations which in turn causes rotation of the rotor. While regular DC motors are characterised by
5 high speed and low torque, requiring reduction gearing to increase torque, ultrasonic motors attain low speed and high torque, thus eliminating the need for reduction gearing. Furthermore, these motors are lightweight and compact, lacking coils and magnets, and are noiseless as the ultrasonic frequencies used are not audible to the human ear.

10

Suitably, the device further comprises actuating means for actuating said electronic drive system. Said actuating means may take the form of a switch, push-button, or lever.

15 Suitably, the device additionally comprises an electronic data management system. The electronic data management system has input/output capability and comprises a memory for storage of data; a microprocessor for performing operations on said data; and a transmitter for transmitting a signal relating to the data or the outcome of an operation on the data.

20

Suitably, the electronic data management system is arranged to be responsive to or activated by the voice of a user. Thus, for example the system may be switched on or off in response to a voice command.

25 The electronic data management system may be integral with the body. Alternatively, the electronic data management system forms part of a base unit which is reversibly associable with the body.

Suitably, the device additionally comprises a data input system for user input of data
30 to the electronic data management system. Preferably, the data input system

comprises a man machine interface (MMI) preferably selected from a keypad, voice recognition interface, graphical user interface (GUI) or biometrics interface.

Energy may be conserved by a variety of means to enable the device to operate for
5 longer on a given source of energy, such as a battery. Energy conservation or saving methods have additional advantages in terms of reducing the size requirements of the power source (e.g. battery) and thus the weight and portability of the medicament dispenser.

10 A variety of energy saving methods is available which generally involve reducing power consumption. One such method is to use a clock or timer circuit to switch the power on and off at regular or predetermined intervals. In another method the system can selectively switch on/off specific electronic devices, such as visual display units or sensors, in order to power these devices only when they are required
15 to perform a particular sequence of events. Thus different electronic devices may be switched on and off at varying intervals and for varying periods under control of the system. The power sequencing system may also respond to a sensor, such as a motion or breath sensor, which is activated on use of the device.

20 Low power or "micropower" components should be used within the electronics where possible and if a high power device is required for a particular function this should be put into a low power standby mode or switched off when not required. Similar considerations apply in the selection of transducers. Operation at low voltage is desirable since power dissipation generally increases with voltage.

25 For low power digital applications complementary metal oxide semi-conductor (CMOS) devices are generally preferred and these may be specially selected by screening for low quiescent currents. Clock speeds of processors and other logic circuits should be reduced to the minimum required for computational throughput as
30 power consumption increases with frequency. Supply voltages should also be kept at minimal values consistent with reliable operation because power dissipation in charging internal capacitance's during switching is proportional to the square of the

voltage. Where possible, supply voltages should be approximately the same throughout the circuit to prevent current flowing through input protection circuits. Logic inputs should not be left floating and circuits should be arranged so that power consumption is minimised in the most usual logic output state. Slow logic transitions
5 are undesirable because they can result in relatively large class-A currents flowing. Resistors may be incorporated in the power supply to individual devices in order to minimise current in the event of failure.

In some control applications, devices that switch between on and off states are
10 preferred to those that allow analog (e.g. linear) control because less power is dissipated in low resistance on states and low current off states. Where linear components are used (e.g. certain types of voltage regulators) then types with low quiescent currents should be selected. In some circuit configurations it is preferable to use appropriate reactive components (i.e. inductors and capacitors) to reduce
15 power dissipation in resistive components.

Suitably, the system additionally comprises a visual display unit for display of data from the electronic data management system to the user. The display may for example, comprise a screen such as an LED or LCD screen. More preferably the
20 visual display unit is associable with the body of the medicament dispenser.

Suitably, the device additionally comprises a datalink for linking to a local data store to enable communication of data between the local data store and the electronic data management system. The datastore may also comprise data management,
25 data analysis and data communication capability.

The datastore may itself form part of a portable device (e.g. a handheld device) or it may be sized and shaped to be accommodated within the patient's home. The datastore may also comprise a physical storage area for storage of replacement
30 cassettes. The datastore may further comprise a system for refilling medicament from a reservoir of medicament product stored therewithin. The datastore may

further comprise an electrical recharging system for recharging any electrical energy store on the medicament dispenser, particularly a battery recharging system.

The datalink may for example enable linking with a docking station, a personal
5 computer, a network computer system or a set-top box by any suitable method including a hard-wired link, an infrared link or any other suitable wireless communications link.

In one aspect, the device includes an electronic dose reminder system. This may be
10 configured to have any suitable form and may be powered by a mains, stored (e.g. battery) or self-regenerating (e.g. solar) energy power source.

The electronic dose reminder system comprises an electronic timer for timing an elapsed time period corresponding to the time since the last actuation of the device;
15 a dose interval memory for storing data relating to a prescribed dose interval time period; and a patient alerter for alerting a user. The alerter activates when the elapsed time period exceeds the prescribed dose interval time period.

The electronic timer progressively times the period since the last actuation of the
20 device (the 'elapsed time period'). The timer can have any suitable electronic form. The significance of the 'elapsed time period' is that in use, it typically corresponds to the time elapsed since the previous dose delivery event.

The timer may be configured to include an automatic re-zeroing feature such that on
25 subsequent actuation of the device the timer count starts again from zero.

The dose interval memory stores data relating to a prescribed dose interval time period. By way of examples, if the medicament is to be taken twice a day at a regular interval, the prescribed dose interval may be set as twelve hours, or for a once daily
30 treatment the value may be set at twenty four hours. In aspects, the system may be configured to allow for ready readjustment of the prescribed dose interval time

period, or it may be configured in secure fashion such that any readjustment may be made only by a designated prescriber (e.g. a medical professional or pharmacist). Password and/or other security means may be employed. The prescribed dose interval may be configured to be variable over a particular course of treatment, or
5 alternatively it may be fixed at a set dose interval over the full course of treatment.

The patient alerter is designed to communicate an alert to the user. The alerter activates only when the holding time period exceeds the prescribed dose interval time period. By way of an example, for a once daily treatment with a prescribed dose
10 interval of twenty four hours, the alerter would activate only when the holding time period, as timed by the electronic timer, exceeds twenty four hours since at this point another dose is due to be taken. It may thus, be appreciated that the alerter acts functionally as a reminder to the patient that a dose is due to be taken.

15 The alerter may in aspects, comprise a visual device, such as a liquid crystal display (LCD) or an array of light-emitting diodes (LEDs), connected to a battery-driven timing device of any convenient kind known to those skilled in the art. The visual device may be configured to display information such as the actual time or the elapsed time from the taking of a previous dosage and may have superimposed
20 thereon additional messages, such as a textual instruction to take a dose of the medicament. Alternatively, the instruction to take the medicament may be conveyed merely by displaying a warning colour or by causing the display to flash or in any other way.

25 In a further alternative arrangement, no specific time or elapsed time information is displayed, but the alerter merely provides a warning signal that indicates the necessary action to the user.

Depending upon the lifestyle of the user, additional or alternative warnings may be of
30 greater assistance than purely visual warnings. Accordingly, the invention envisages

that the alerter may provide audible and/or tactile warnings, such as vibration, instead of (or in addition to) visual warnings.

The alerter may provide a single, one-off alert. More preferably, the alerter is
5 configured to provide the alert over a set period of time (the 'alerting time period' or
'alerting window'). In one aspect, the alerting time period is calculated as a function
of (e.g. fraction of) the dose interval time period. For example, for a twice daily
treatment with a dose interval time period of twelve hours, the alerting time period
may be set as half that period (i.e. six hours). In this case, the alert is then provided
10 for the six hours immediately following the activation of the alert.

The system is typically configured such that the alerting signal cuts off when the user
removes the medicament delivery device from the holder to enable dosing of
medicament therefrom. The system is then reset. Other manual cutoffs / overrides
15 may also be included.

In a subtle aspect of the present invention, it may be appreciated that the relevant
timeframe for detecting, timing and alerting are determined by user action in relation
to the system, and in particular by user action. The dose reminder capability is
20 therefore independent of any particular defined external time zone (e.g. the local
time zone relative to Greenwich Mean Time, as defined by the twenty four hour
clock) because the user action defines its own 'reminder timeframe'. This provides
advantages over other known reminder systems, which are reliant on user reference
to defined external time frames. The advantage is particularly great for the
25 international traveller since complex calculations involving different local time zones
are avoided.

It will be appreciated from the above description that the various components of the
electronic dose reminder system interrelate with each other to provide the required
30 functionality. The system may be configured in any suitable fashion using known
electronic components and circuitry methods.

Suitably, the device additionally comprises an actuation detector for detecting actuation of any one of the medicament dispensers thereof wherein said actuation detector transmits actuation data to the electronic data management system.

5

The device may additionally comprise a safety mechanism to prevent unintended multiple actuations of the component medicament dispensers. The patient is thereby, for example, protected from inadvertently receiving multiple doses of medicament in a situation where they take a number of short rapid breaths. More preferably, the safety mechanism imposes a time delay between successive actuations of the release means. The time delay is typically of the order of from three to thirty seconds.

Suitably, the device additionally comprises a release detector for detecting release of medicament from the cassette, wherein said release detector transmits release data to the electronic data management system.

Suitably, the device additionally comprises a shake detector for detecting shaking of the medicament container (e.g. prior to actuation of the dispensing mechanism), wherein said shake detector transmits shake data to the electronic data management system.

Suitably, any actuation detector, release detector, or shake detector comprises a sensor for detecting any suitable parameter such as movement. Any suitable sensors are envisaged including the use of optical sensors. The release detector may sense any parameter affected by release of the medicament such as pressure, temperature, sound, moisture, carbon dioxide concentration and oxygen concentration.

Suitably, the device additionally comprises a breath trigger for triggering one or all of the component medicament dispensers, said breath trigger being actuable in

response to a trigger signal from the electronic data management system. Preferably, the electronic data management system includes a predictive algorithm or look-up table for deriving from the breath data when to transmit the trigger signal. For example, a real-time analysis of the patient breath waveform may be made and
5 the trigger point derived by reference to that analysed waveform.

Suitably, the electronic data management system includes a predictive algorithm or look-up table for calculating the optimum amount of medicament to dispense.

- 10 Suitably, the memory on the electronic data management system includes a dose memory for storing dosage data and reference is made to the dose memory in calculating the optimum amount of medicament to dispense.

Suitably, the device additionally comprises a selector for selecting the amount of
15 medicament to dispense from said dispensing mechanism. In one aspect, the selector is manually operable. In another aspect, the selector is operable in response to a signal from the transmitter on the electronic data management system.

Suitably, the device comprises in association with a body or housing thereof, a first
20 transceiver for transmitting and receiving data and in association with the medicament container, a second transceiver for transmitting and receiving data, wherein data is transferable in two-way fashion from the first transceiver to the second transceiver. The data is preferably in digital form and suitable for transfer by electronic or optical means. A medicament dispenser of this general type is
25 described in pending UK Patent Application No. 0020538.5.

One advantage of embodiments of this type is the ability to store many types of information in different parts of the memory structure of the transceivers. The information is furthermore stored in a form which is readily and accurately
30 transferable. The information could for example, include manufacturing and distribution compliance information written to the memory at various points in the

manufacturing or distribution process, thereby providing a detailed and readily accessible product history of the dispenser. Such product history information may, for example, be referred to in the event of a product recall. The compliance information could, for example, include date and time stamps. The information could
5 also include a unique serial number stored in encrypted form or in a password protectable part of the memory which uniquely identifies the product and therefore may assist in the detection and prevention of counterfeiting. The information could also include basic product information such as the nature of the medicament and dosing information, customer information such as the name of the intended
10 customer, and distribution information such as the intended product destination.

On loading or reloading the device with a medicament dispenser or 'refill' the second transceiver may, for example, read the unique serial number, batch code and expiry date of the medicament and any other information on the second transceiver. In this
15 way the nature and concentration of the medicament, together with the number of doses used or remaining within the cassette, may be determined. This information can be displayed to the patient on a visual display unit. Other information, such as the number of times the medicament dispenser has been reloaded with a cassette, may also be displayed.

20

Similarly, should the cassette be removed from the holder before the supply of medicament is exhausted, the same data can be read from the second transceiver and the number of doses remaining or used determined. Other information, such as the date and time of administration of the drug, or environmental exposure data such
25 as the minimum / maximum temperatures or levels of humidity the cassette has been exposed to, may also be read and displayed to the user.

In the event that the supply of medicament within any medicament container becomes exhausted, or that the shelf life of the medicament has expired, or that the
30 first transceiver does not recognise the batch code on the second transceiver, activation of the dispenser may be prevented to safeguard the user. Activation may

also be prevented if the medicament has been exposed to extreme environmental conditions for periods outwith the manufacturer's guidelines.

5 Data may be transferred to and from any transceiver during the period of use of the medicament dispenser by the patient. For example, the medicament dispenser may include an electronic data management system having various sensors associated therewith. Any data collected by the sensors or from any data collection system associated with the electronic data management system including a clock or other date/time recorder is transferable.

10 Data may be transferred each time the patient uses the device. Or alternatively, data may be stored in a database memory of the electronic data management system and periodically downloaded to any transceiver. In either case, a history of the usage of the device may be built up in the memory of a transceiver.

15 In one embodiment herein, a history of the usage of the device is transferred to the second transceiver. When the medicament carriers in the cassette are exhausted it is exchanged by the patient for a new refill cassette. At the point of exchange, which will typically occur at the pharmacy, data may be transferred from the exhausted
20 cassette to the refill and vice-versa. Additionally, usage history data may be read from the refill and transferred to a healthcare data management system for example comprising a network computer system under the control of a healthcare data manager.

25 Methods are envisaged herein whereby the patient is given some sort of reward for returning the refill and making available the data comprised within the second transceiver. Methods are also envisaged herein whereby the healthcare data manager is charged for either receipt of the data from the second transceiver or for its use for commercial purposes. Any rewards or charging may be arranged
30 electronically. The methods may be enabled by distributed or web-based computer network systems in which any collected data is accessible through a hub on the

network. The hub may incorporate various security features to ensure patient confidentiality and to allow selective access to information collected dependent upon level of authorisation. The level of user authorisation may be allocated primarily to safeguard patient confidentiality. Beyond this the level of user authorisation may
5 also be allocated on commercial terms with for example broader access to the database being authorised in return for larger commercial payments.

Suitably, the first and second transceiver each comprise an antenna or equivalent for transmitting or receiving data and connecting thereto a memory. The memory will
10 typically comprise an integrated circuit chip. Either transceiver may be configured to have a memory structure which allows for large amounts of information to be stored thereon. The memory structure can be arranged such that parts of the memory are read-only, being programmed during/after manufacture, other parts are read/write and further parts are password protectable. Initial transfer of information (e.g. on
15 manufacture or one dispensing) to or from any transceiver can be arranged to be readily achievable by the use of a reader which is remote from the medicament dispenser, thereby minimising the need for direct product handling. In further aspects, the reader can be arranged to simultaneously read or write to the memory of multiple transceivers on multiple medicament dispensers.

20

A suitable power source such as a battery, clockwork energy store, solar cell, fuel cell or kinetics-driven cell will be provided as required to any electronic component herein. The power source may be arranged to be rechargeable or reloadable.

25 Suitably, data is transferable in two-way fashion between the first and second transceiver without the need for direct physical contact therebetween. Preferably, data is transferable wirelessly between the first and second transceiver.

Suitably, the first transceiver is an active transceiver and the second transceiver is a
30 passive transceiver. The term active is used to mean directly-powered and the term passive is used to mean indirectly-powered.

Suitably, the second transceiver comprises a label or tag comprising an antenna for transmitting or receiving energy; and an integrated circuit chip connecting with said antenna, and the first transceiver comprises a reader for said label or tag. In this
5 case the label or tag is a passive transceiver and the reader is an active transceiver. Preferably, the reader will not need to be in direct contact with the tag or label to enable the tag or label to be read.

The tag may be used in combination and/or integrated with other traditional product
10 labelling methods including visual text, machine-readable text, bar codes and dot codes.

Suitably, the integrated circuit chip has a read only memory area, a write only memory area, a read/write memory area or combinations thereof.
15

Suitably, the integrated circuit chip has a one-time programmable memory area. More preferably, the one-time programmable memory area contains a unique serial number.

20 Suitably, the integrated circuit chip has a preset memory area containing a factory preset, non-changeable, unique data item. The preset memory item is most preferably in encrypted form.

Suitably, the integrated circuit chip has plural memory areas thereon. Suitably, any
25 memory area is password protected.

Suitably, any memory area contains data in encrypted form. Electronic methods of checking identity, error detection and data transfer may also be employed.

30 In one aspect, the integrated circuit has plural memory areas thereon including a read only memory area containing a unique serial number, which may for example

be embedded at the time of manufacture; a read/write memory area which can be made read only once information has been written thereto; and a password protected memory area containing data in encrypted form which data may be of anti-counterfeiting utility.

5

Suitably, the tag is on a carrier and the carrier is mountable on the body or holder of the medicament dispenser or on the cassette.

In one aspect, the carrier is a flexible label. In another aspect, the carrier is a rigid
10 disc. In a further aspect, the carrier is a rectangular block. In a further aspect, the carrier is a collar ring suitable for mounting to the neck of an aerosol container. Other shapes of carrier are also envisaged.

Suitably, the carrier is mouldable or weldable to the cassette or housing. Suitably,
15 the carrier encases the tag. More preferably, the carrier forms a hermetic seal for the tag.

In one aspect, the carrier comprises an insulating material such as a glass material or, a paper material or an organic polymeric material such as polypropylene.
20 Alternatively, the carrier comprises a ferrite material.

The energy may be in any suitable form including ultrasonic, infrared, radiofrequency, magnetic, optical and laser form. Any suitable channels may be used to channel the energy including fibre optic channels.

25

In one aspect, the second transceiver comprises a radiofrequency identifier comprising an antenna for transmitting or receiving radiofrequency energy; and an integrated circuit chip connecting with said antenna, and the first transceiver comprises a reader for said radiofrequency identifier. In this case the radiofrequency
30 identifier is a passive transceiver and the reader is an active transceiver. An

advantage of radiofrequency identifier technology is that the reader need not be in direct contact with the radiofrequency identifier tag or label to be read.

The radiofrequency identifier can be any known radiofrequency identifier. Such
5 identifiers are sometimes known as radiofrequency transponders or radiofrequency
identification (RFID) tags or labels. Suitable radiofrequency identifiers include those
sold by Phillips Semiconductors of the Netherlands under the trade marks Hitag and
Icode, those sold by Amtech Systems Corporation of the United States of America
under the trade mark Intellitag, and those sold by Texas Instruments of the United
10 States of America under the trade mark Tagit.

Suitably, the antenna of the RFID tag is capable of transmitting or receiving
radiofrequency energy having a frequency of from 100 kHz to 2.5 GHz. Preferred
operating frequencies are selected from 125 kHz, 13.56 MHz and 2.4 GHz.

15

In one aspect, the second transceiver comprises a magnetic label or tag comprising
an antenna for transmitting or receiving magnetic field energy; and an integrated
circuit chip connecting with said antenna, and the first transceiver comprises a
reader for said magnetic label or tag. In this case the magnetic label or tag is a
20 passive transceiver and the reader is an active transceiver.

A suitable magnetic label or tag comprises plural magnetic elements in mutual
association whereby the magnetic elements move relative to each other in response
to an interrogating magnetic field. A magnetic label or tag of this type is described in
25 U.S. Patent No. 4,940,966. Another suitable magnetic label or tag comprises a
magnetorestrictive element which is readable by application of an interrogating
alternating magnetic field in the presence of a magnetic bias field which results in
resonance of the magnetorestrictive elements at different predetermined
frequencies. A magnetic label of this type is described in PCT Patent Application
30 No. WO92/12402. Another suitable magnetic label or tag comprising plural discrete
magnetically active regions in a linear array is described in PCT Patent Application

No. WO96/31790. Suitable magnetic labels and tags include those making use of Programmable Magnetic Resonance (PMR) (trade name) technology.

In another aspect, the second transceiver comprises a microelectronic memory chip
5 and the first transceiver comprises a reader for said microelectronic memory chip.
The microelectronic memory chip may comprise an Electrically Erasable
Programmable Read Only Memory (EEPROM) chip or a SIM card-type memory
chip. In this case the microelectronic memory chip is a passive transceiver and the
reader is an active transceiver.

10

Any transceiver herein, particularly a passive transceiver may be mounted on or
encased within any suitable inert carrier. The carrier may comprise a flexible sheet
which may in embodiments be capable of receiving printed text thereon.

15 In one aspect, the first transceiver is integral with the body such that a single unit is
comprised. The first transceiver may for example be encased within or moulded to
the body.

In another aspect, the first transceiver forms part of a base unit which is reversibly
20 associable with the body. The base unit may for example, form a module receivable
by the body such as a snap-in module.

Suitably, the device additionally comprises a communicator for wireless
communication with a network computer system to enable transfer of data between
25 the network computer system and the electronic data management system.
Dispensers employing such communicators are described in pending PCT
Applications No.s PCT/EP00/09291 (PG3786), PCT/EP00/09293 (PG4029) and
PCT/EP00/09292 (PG4159). Preferably, the communicator enables two-way
transfer of data between the network computer system and the electronic data
30 management system.

Suitably, the data is communicable between the network computer system and the electronic data management system in encrypted form. All suitable methods of encryption or partial encryption are envisaged. Password protection may also be employed. Suitably, the communicator employs radiofrequency or optical signals.

5

In one aspect, the communicator communicates via a gateway to the network computer system. In another aspect, the communicator includes a network server (e.g. a web server) such that it may directly communicate with the network.

- 10 In a further aspect, the communicator communicates with the gateway via a second communications device. Preferably, the second communications device is a telecommunications device, more preferably a cellular phone or pager. Preferably, the communicator communicates with the second communications device using spread spectrum radiofrequency signals. A suitable spread spectrum protocol is the
- 15 Bluetooth (trade mark) standard which employs rapid (e.g. 1600 times a second) hopping between plural frequencies (e.g. 79 different frequencies). The protocol may further employ multiple sending of data bits (e.g. sending in triplicate) to reduce interference.

- 20 In one aspect, the network computer system comprises a public access network computer system. The Internet is one suitable example of a public access network computer system, wherein the point of access thereto can be any suitable entrypoint including an entrypoint managed by an Internet service provider. The public access network computer system may also form part of a telecommunications system, which
- 25 may itself be either a traditional copper wire system, a cellular system or an optical network.

In another aspect, the network computer system comprises a private access network computer system. The private access network system may for example, comprise

30 an Intranet or Extranet which may for example, be maintained by a health service

provider or medicament manufacturer. The network may for example include password protection; a firewall; and suitable encryption means.

Preferably, the communicator enables communication with a user-specific network
5 address in the network computer system.

The user-specific network address may be selected from the group consisting of a web-site address, an e-mail address and a file transfer protocol address. Preferably, the user-specific network address is accessible to a remote information source such
10 that information from said remote information source can be made available thereto. More preferably, information from the user-specific network address can be made available to the remote information source.

In one aspect, the remote information source is a medicament prescriber, for
15 example a doctors practice. Information transferred from the medicament prescriber may thus, comprise changes to prescription details, automatic prescription updates or training information. Information transferred to the medicament prescriber may comprise compliance information, that is to say information relating to the patient's compliance with a set prescribing programme. Patient performance information
20 relating for example, to patient-collected diagnostic data may also be transferred to the medicament prescriber. Where the dispenser is an inhaler for dispensing medicament for the relief of respiratory disorders examples of such diagnostic data would include breath cycle data or peak flow data.

25 In another aspect, the remote information source is a pharmacy. Information transferred from the pharmacy may thus, comprise information relating to the medicament product. Information sent to the pharmacy may thus include prescription requests which have been remotely pre-authorised by the medicament prescriber.

30

In a further aspect, the remote information source is an emergency assistance provider, for example a hospital accident and emergency service or an emergency helpline or switchboard. The information may thus, comprise a distress or emergency assist signal which requests emergency assistance.

5

In a further aspect, the remote information source is a manufacturer of medicament or medicament delivery systems. Information transferred to the system may thus, comprise product update information. The system may also be configured to feed information back to the manufacturer relating to system performance.

10

In a further aspect, the remote information source is a research establishment. In a clinical trial situation, information may thus be transferred relating to the trial protocol and information relating to patient compliance fed back to the research establishment.

15

In a further aspect, the remote information source is an environmental monitoring station. Information relating to weather, pollen counts and pollution levels may thus be made accessible to the system.

20 Suitably, the device additionally comprises a geographic positioning system such as a global positioning system or a system which relies on the use of multiple communications signals and a triangulation algorithm.

According to another aspect of the present invention there is provided a medicament
25 pack for use with a multi-component combination medicament product, the pack comprising

a first medicament container containing plural co-formulation compatible medicament components; and

30

at least one further medicament container, each containing at least one co-formulation incompatible medicament component; and

wherein the at least one co-formulation incompatible medicament component is kept
5 separate from the plural co-formulation compatible components.

In one aspect, each pack comprises an elongate form medicament carrier having multiple distinct medicament dose portions carried thereby. Suitably, each elongate form medicament carrier is in the form of a strip or tape. The term medicament
10 carrier is used to define any suitable carrier. In a preferred aspect, the carrier has a blister pack form, but it could also, for example, comprise a carrier onto which medicament has been applied by any suitable process including printing, painting and vacuum occlusion.

15 The elongate form medicament carrier pack is suitable for use with a dispenser device incorporating release means for releasing a distinct medicament dose portion from each of the plural medicament carriers. The release means can have any suitable form. Where the elongate carrier is in the form of a blister strip, the release means may for example, be a means to rupture or otherwise access the blister. In a
20 particular preferred aspect, where the blister strip is peelably accessible, the release means comprises means for peeling apart the blister strip.

The constituent medicaments of the plural medicament dose portions suitably, in
25 combination comprise a combination medicament product. Suitably the medicaments are selected from the group consisting of albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof. Preferably, the combination comprises salmeterol xinafoate and fluticasone propionate.

30

Brief Description of the Drawings

The invention will now be described with reference to the accompanying drawings in which:

5

It may be appreciated that any of the parts of the device or any medicament thereof which contacts medicament may be coated with materials such as fluoropolymer materials (e.g. PTFE or FEP) which reduce the tendency of medicament to adhere thereto. Any movable parts may also have coatings applied thereto which enhance their desired movement characteristics. Frictional coatings may therefore be applied to enhance frictional contact and lubricants (e.g. silicone oil) used to reduce frictional contact as necessary.

15 The device of the invention is suitable for dispensing 'multi-active' medicament combinations, particularly for the treatment of respiratory disorders such as asthma and chronic obstructive pulmonary disease (COPD), bronchitis and chest infections.

The overall 'multi-active' combination product comprises in combination, a first component comprising plural co-formulation compatible medicament components; and at least one further component, each comprising at least one co-formulation incompatible medicament component. The dispenser device herein enables the delivery of these components together in combination, even though on containment within the device they are kept separate.

25

Appropriate medicaments may thus be selected from, for example, analgesics, e.g., codeine, dihydromorphine, ergotamine, fentanyl or morphine; anginal preparations, e.g., diltiazem; antiallergics, e.g., cromoglycate (e.g. as the sodium salt), ketotifen or nedocromil (e.g. as the sodium salt); anti-infectives e.g., cephalosporins, penicillins, streptomycin, sulphonamides, tetracyclines and pentamidine; antihistamines, e.g., methapyrilene; anti-inflammatory, e.g., beclomethasone (e.g. as the dipropionate

ester), fluticasone (e.g. as the propionate ester), flunisolide, budesonide, rofleponide, mometasone e.g. as the furoate ester), ciclesonide, triamcinolone (e.g. as the acetone) or 6 α , 9 α -difluoro-11 β -hydroxy-16 α -methyl-3-oxo-17 α -propionyloxy-androsta-1,4-diene-17 β -carbothioic acid S-(2-oxo-tetrahydro-furan-3-yl) ester;
5 antitussives, e.g., noscapine; bronchodilators, e.g., albuterol (e.g. as free base or sulphate), salmeterol (e.g. as xinafoate), ephedrine, adrenaline, fenoterol (e.g. as hydrobromide), formoterol (e.g. as fumarate), isoprenaline, metaproterenol, phenylephrine, phenylpropanolamine, pirbuterol (e.g. as acetate), reproterol (e.g. as hydrochloride), rimiterol, terbutaline (e.g. as sulphate), isoetharine, tulobuterol or 4-
10 hydroxy-7-[2-[[3-(2-phenylethoxy)propyl]sulfonyl]ethyl]amino]ethyl-2(3H)-benzothiazolone; adenosine 2a agonists, e.g. 2R,3R,4S,5R)-2-[6-Amino-2-(1S-hydroxymethyl-2-phenyl-ethylamino)-purin-9-yl]-5-(2-ethyl-2H-tetrazol-5-yl)-tetrahydro-furan-3,4-diol (e.g. as maleate); α_4 integrin inhibitors e.g. (2S)-3-[4-((4-(aminocarbonyl)-1-piperidinyl)carbonyl)oxy)phenyl]-2-(((2S)-4-methyl-2-[[2-(2-
15 methylphenoxy) acetyl]amino]pentanoyl)amino] propanoic acid (e.g. as free acid or potassium salt), diuretics, e.g., amiloride; anticholinergics, e.g., ipratropium (e.g. as bromide), tiotropium, atropine or oxitropium; hormones, e.g., cortisone, hydrocortisone or prednisolone; xanthines, e.g., aminophylline, choline theophyllinate, lysine theophyllinate or theophylline; therapeutic proteins and
20 peptides, e.g., insulin or glucagon; vaccines, diagnostics, and gene therapies. It will be clear to a person skilled in the art that, where appropriate, the medicaments may be used in the form of salts, (e.g., as alkali metal or amine salts or as acid addition salts) or as esters (e.g., lower alkyl esters) or as solvates (e.g., hydrates) to optimise the activity and/or stability of the medicament.

25

Preferred medicaments are selected from albuterol, salmeterol, fluticasone propionate and beclomethasone dipropionate and salts or solvates thereof, e.g., the sulphate of albuterol and the xinafoate of salmeterol.

30 Co-formulation compatibility is generally determined on an experimental basis by known methods and may depend on chosen product type (e.g. DPI, MDI, LSI).

Examples of generally co-formulation compatible combinations of active ingredients include those containing salbutamol (e.g., as the free base or the sulphate salt) or salmeterol (e.g., as the xinafoate salt) or formoterol (eg as the fumarate salt) in
5 combination with an anti-inflammatory steroid such as a beclomethasone ester (e.g., the dipropionate) or a fluticasone ester (e.g., the propionate) or budesonide. A particularly preferred co-formulation compatible combination of components comprises fluticasone propionate and salmeterol, or a salt thereof (particularly the xinafoate salt). A further co-formulation compatible combination of components of
10 particular interest is budesonide and formoterol (e.g. as the fumarate salt).

Generally, powdered medicament particles suitable for delivery to the bronchial or alveolar region of the lung have an aerodynamic diameter of less than 10 micrometers, preferably less than 6 micrometers. Other sized particles may be used
15 if delivery to other portions of the respiratory tract is desired, such as the nasal cavity, mouth or throat. The medicament may be delivered as pure drug, but more appropriately, it is preferred that medicaments are delivered together with excipients (carriers) which are suitable for inhalation. Suitable excipients include organic excipients such as polysaccharides (i.e. starch, cellulose and the like), lactose,
20 glucose, mannitol, amino acids, and maltodextrins, and inorganic excipients such as calcium carbonate or sodium chloride. Lactose is a preferred excipient.

Particles of powdered medicament and/or excipient may be produced by conventional techniques, for example by micronisation, milling or sieving.
25 Additionally, medicament and/or excipient powders may be engineered with particular densities, size ranges, or characteristics. Particles may comprise active agents, surfactants, wall forming materials, or other components considered desirable by those of ordinary skill.

30 The excipient may be included with the medicament via well-known methods, such as by admixing, co-precipitating and the like. Blends of excipients and drugs are

typically formulated to allow the precise metering and dispersion of the blend into doses. A standard blend, for example, contains 13000 micrograms lactose mixed with 50 micrograms drug, yielding an excipient to drug ratio of 260:1. Dosage blends with excipient to drug ratios of from 100:1 to 1:1 may be used. At very low ratios of
5 excipient to drug, however, the drug dose reproducibility may become more variable.

Aerosol formulations suitable for use with metered dose inhaler (MDI) dispensers typically comprise a propellant. Suitable propellants include P11, P114 and P12, and the CFC-free hydrofluoroalkane propellants HFA-134a and HFA-227.

10

The MDI aerosol formulation may additionally contain a volatile adjuvant such as a saturated hydrocarbon for example propane, n-butane, isobutane, pentane and isopentane or a dialkyl ether for example dimethyl ether. In general, up to 50% w/w of the propellant may comprise a volatile hydrocarbon, for example 1 to 30% w/w.

15 However, formulations, which are free or substantially free of volatile adjuvants are preferred. In certain cases, it may be desirable to include appropriate amounts of water, which can be advantageous in modifying the dielectric properties of the propellant.

20 A polar co-solvent such as C₂₋₆ aliphatic alcohols and polyols e.g. ethanol, isopropanol and propylene glycol, preferably ethanol, may be included in the MDI aerosol formulation in the desired amount to improve the dispersion of the formulation, either as the only excipient or in addition to other excipients such as surfactants. Suitably, the drug formulation may contain 0.01 to 30% w/w based on
25 the propellant of a polar co-solvent e.g. ethanol, preferably 0.1 to 20% w/w e.g. about 0.1 to 15% w/w. In aspects herein, the solvent is added in sufficient quantities to solubilise the part or all of the medicament component, such formulations being commonly referred to as solution formulations.

30 A surfactant may also be employed in the MDI aerosol formulation. Examples of conventional surfactants are disclosed in EP-A-372,777. The amount of surfactant

employed is desirable in the range 0.0001% to 50% weight to weight ratio relative to the medicament, in particular, 0.05 to 5% weight to weight ratio.

The final aerosol formulation desirably contains 0.005-10% w/w, preferably 0.005 to 5% w/w, especially 0.01 to 1.0% w/w, of medicament relative to the total weight of the formulation.

The device of the invention is in one aspect suitable for dispensing medicament for the treatment of respiratory disorders such as disorders of the lungs and bronchial tracts including asthma and chronic obstructive pulmonary disorder (COPD). In another aspect, the invention is suitable for dispensing medicament for the treatment of a condition requiring treatment by the systemic circulation of medicament, for example migraine, diabetes, pain relief e.g. inhaled morphine.

Accordingly, there is provided the use of a device according to the invention for the treatment of a respiratory disorder, such as asthma and COPD. Alternatively, the present invention provides a method of treating a respiratory disorder such as, for example, asthma and COPD, which comprises administration by inhalation of an effective amount of medicament product as herein described from a device of the present invention.

It will be understood that the present disclosure is for the purpose of illustration only and the invention extends to modifications, variations and improvements thereto.

The application of which this description and claims form part may be used as a basis for priority in respect of any subsequent application. The claims of such subsequent application may be directed to any feature or combination of features described therein. They may take the form of product, method or use claims and may include, by way of example and without limitation, one or more of the following claims:

Claims

1. A medicament dispenser device for use in the delivery of a multi-component combination medicament product, the device comprising

5

a first medicament container containing plural co-formulation compatible medicament components;

first release means for releasing the contents of the first medicament container for
10 delivery thereof;

at least one further medicament container, each containing at least one co-formulation incompatible medicament component; and

15 at least one further release means for releasing the contents of each at least one further medicament container for delivery thereof;

wherein the at least one co-formulation incompatible medicament component is kept separate from the plural co-formulation compatible components until the point of
20 release thereof for delivery in combination.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.